



FOR ALL FIRE HYDRANTS INSTALLED, THE SETBACK SHALL TYPICALLY BE 30", BUT SHALL BE MODIFIED AS REQUIRED TO PROVIDE 4' MIN. SIDEWALK CLEARANCE FOR ADA COMPLIANCE.

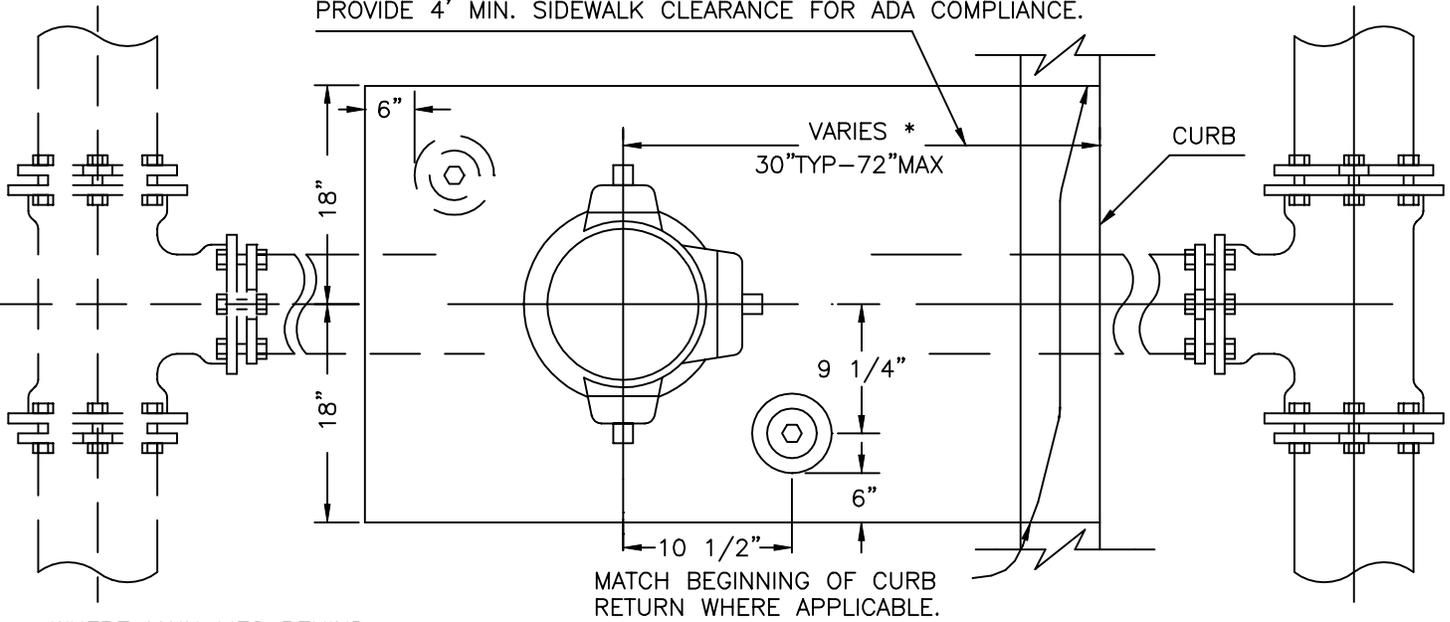

WHERE MAIN LIES BEHIND CURB, PIPE & VALVE DETAILS SHALL BE REVERSED.

NOTE: CAP AND OPERATING NUTS ARE 1 1/8" PENTAGON.

NOTE: BUTTERFLY VALVE TO BE TIED TO MAIN PER STD DWG W-37.

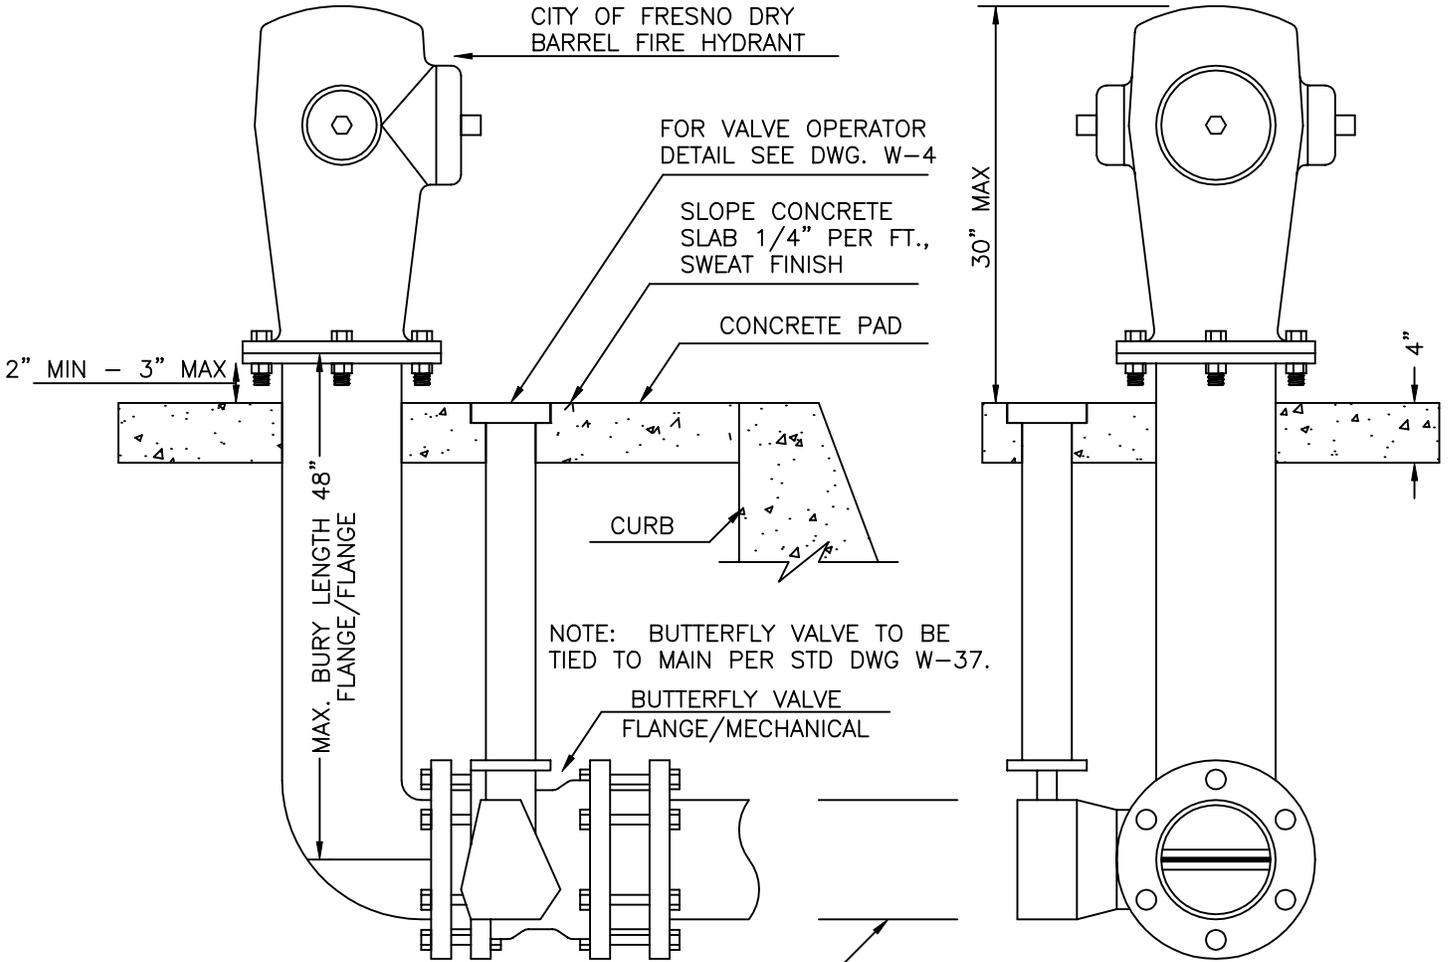

NOTE: BUTTERFLY VALVE TO BE TIED TO MAIN PER STD DWG W-37.

HYDRANT RUN BETWEEN VALVE & TEE SHALL BE ADJUSTED SO THAT ELEVATION OF HYDRANT BURY FLANGE IS LEVEL & TO GRADE AS SHOWN, OR AS DIRECTED.

\* PROVIDE 4' MIN. SIDEWALK CLEARANCE ADJACENT TO FIRE HYDRANT FOR ADA ACCESSIBILITY REQUIREMENTS.